


4-way Cassette



Compact 4-way Cassette

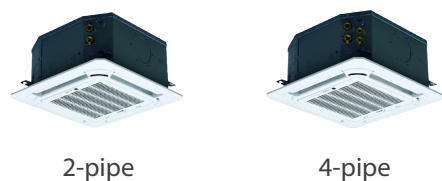

Various Selections

- Versions for 2/4 pipe system.
- Versions for compact/normal size.

Stylish Panel with Large Airflow Outlet

- 4-way air supply panel is standard for 4-way cassette.
- 360° air supply panel is standard for compact 4-way cassette.

4-way panel




360° panel



Compact Design, Easy Installation

- For Compact Four-way Cassette: Extremely compact casing suits any room's decor and requires little space for installation on a low ceiling. Due to compact body and light weight, all models can be installed without a hoist.

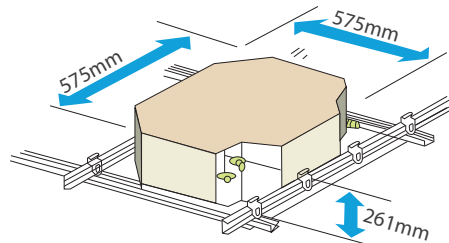


High Efficiency and Low Sound Operation

Various Accessories Selections

- Thanks to the DC brushless fan motor, the unit operates in high efficiency and low sound level.
- Extended drainage pan for better ceiling protection is optional.

High-lift Drain Pump

- Standard built-in drain pump with 750mm pump head for normal size and 500mm for compact size.

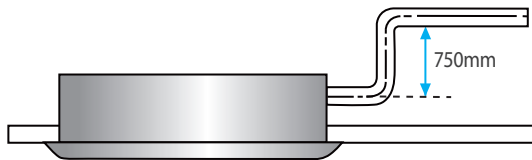

Fresh Air Intake

- Fresh air can enter through the cassette unit so you can enjoy even fresher air in a room.



2-Pipe 4-Way Cassette



Model			NFC-V600R-2-2P	NFC-V750R-2-2P	NFC-V850R-2-2P
Power supply		V/Ph/Hz	220-240/1/50		
Air flow (H/M/L)		m³/h	1175/987/768	1229/1020/810	1451/1146/1012
		CFM	691/580/451	722/600/476	853/674/595
Cooling¹	Capacity (H/M/L)	kW	5.93/5.3/4.4	6.12/5.45/4.6	7.52/6.46/5.89
	Water flow rate(H/M/L)	m³/h	1.06/0.92/0.77	1.10/0.96/0.81	1.37/1.18/1.07
	Water pressure drop(H/M/L)	kPa	19.2/15.4/11	21.3/21.3/12.4	20.1/15.3/12.6
	Power input(H/M/L)	W	41/27/17	49/31/20	68/37/30
Heating²	Capacity (H/M/L)	kW	6.06/5.72/5.32	6.27/5.88/5.43	7.88/7.48/6.76
	Water flow rate(H/M/L)	m³/h	1.30/1.14/1.13	1.39/1.20/1.00	1.66/1.39/1.25
	Water pressure drop(H/M/L)	kPa	25.9/20.1/19.9	30/22.7/16.3	26.7/18.8/15.6
	Power input(H/M/L)	W	42/28/17	44/32/20	66/37/28
Heating³	Capacity (H/M/L)	kW	8.42/7.37/6.06	8.62/7.49/6.27	10.37/8.72/7.88
	Water flow rate(H/M/L)	m³/h	1.06/0.92/0.77	1.10/0.96/0.81	1.37/1.18/1.07
	Water pressure drop(H/M/L)	kPa	16.9/12.7/8.6	19.1/14.8/10.6	18.2/13.6/11.1
	Power input(H/M/L)	W	42/28/17	49/31/19	67/37/28
Sound pressure level (H/M/L)		dB(A)	43/39/33	44/40/34	45/40/37
Fan motor	Type	DC Motor			
	Quantity	1			
Fan	Type	Centrifugal, forward-curved Blades			
	Quantity	1			
Coil	Row	2			
	Max. Working pressure	MPa	1.6	1.6	1.6
Panel	Diameter	mm	Ø7	Ø7	Ø7
	Net dimensions (W×H×D)	mm	950×45×950	950×45×950	950×45×950
	Packing size (W×H×D)	mm	1035×90×1035	1035×90×1035	1035×90×1035
	Net weight	kg	6	6	6
Body	Gross weight	kg	9	9	9
	Net dimensions (W×H×D)	mm	840×230×840	840×230×840	840×300×840
	Packing size (W×H×D)	mm	900×237×900	900×237×900	900×330×900
	Net weight	kg	23	23	27
Pipe connections	Gross weight	kg	28	28	33
	Water inlet/outlet pipe	inch	RC3/4	RC3/4	RC3/4
	Drain pipe	mm	ODØ82	ODØ82	ODØ82

Model			NFC-V950R-2-2P	NFC-V1200R-2-2P	NFC-V1500R-3-2P
Power supply		V/Ph/Hz	220-240/1/50		
Air flow (H/M/L)		m³/h	1530/1224/1101	1581/1371/1236	1871/1415/1198
		CFM	900/720/647	930/806/727	1100/832/704
Cooling¹	Capacity (H/M/L)	kW	7.84/6.84/6.35	7.87/7.12/6.67	11.19/8.82/7.48
	Water flow rate(H/M/L)	m³/h	1.43/1.24/1.13	1.44/1.28/1.22	1.96/1.53/1.28
	Water pressure drop(H/M/L)	kPa	22/17/14.1	22.3/18.1/16.3	36.6/22.7/16.4
	Power input(H/M/L)	W	75/42/34	85/59/45	126/58/39
Heating²	Capacity (H/M/L)	kW	8.49/8/7.35	9.16/8.54/7.9	10.07/9.37/8.68
	Water flow rate(H/M/L)	m³/h	1.71/1.45/1.33	1.73/1.57/1.46	2.35/1.86/1.59
	Water pressure drop(H/M/L)	kPa	28.1/20.7/17.4	28.8/24/20.7	49.2/31.2/23.3
	Power input(H/M/L)	W	76/43/33	86/59/45	128/58/38
Heating³	Capacity (H/M/L)	kW	10.86/9.24/8.49	10.92/9.84/9.16	14.92/11.73/10.07
	Water flow rate(H/M/L)	m³/h	1.43/1.24/1.13	1.44/1.28/1.22	1.96/1.53/1.28
	Water pressure drop(H/M/L)	kPa	19.9/15.2/12.6	20/16.2/14.7	34.3/21.3/15
	Power input(H/M/L)	W	76/42/33	85/58/45	127/58/39
Sound pressure level (H/M/L)		dB(A)	46/42/39	48/44/41	49/43/39
Fan motor	Type	DC Motor			
	Quantity	1			
Fan	Type	Centrifugal, forward-curved Blades			
	Quantity	1			
Coil	Row	2			
	Max. Working pressure	MPa	1.6	1.6	1.6
Panel	Diameter	mm	Ø7	Ø7	Ø7
	Net dimensions (W×H×D)	mm	950×45×950	950×45×950	950×45×950
	Packing size (W×H×D)	mm	1035×90×1035	1035×90×1035	1035×90×1035
	Net weight	kg	6	6	6
Body	Gross weight	kg	9	9	9
	Net dimensions (W×H×D)	mm	840×300×840	840×300×840	840×300×840
	Packing size (W×H×D)	mm	900×330×900	900×330×900	900×330×900
	Net weight	kg	27	27	29.5
Pipe connections	Gross weight	kg	33	33	34.5
	Water inlet/outlet pipe	inch	RC3/4	RC3/4	RC3/4
	Drain pipe	mm	ODØ82	ODØ82	ODØ82

Notes:

H:High fan speed; M: Medium fan speed; L: Low fan speed.

1:Cooling mode (2 and 4-pipe coil): entering air temperature 27°C DB/19°C WB, entering/leaving water temperature 7°C /12°C.

2:Heating mode(1): (2-pipe coil): entering air temperature 20°C DB, entering/leaving water temperature 45/40°C.

3:Heating mode(2): (2-pipe coil): entering air temperature 20°C DB, enter water teperature/water flow 50°C/°*(same water flow as in standard rating condition in cooling)

4:Noise is tested in a semi-anechoic test room.

4-Pipe 4-Way Cassette



Model			NFC-V600R-2-4P	NFC-V750R-2-4P	NFC-V850R-2-4P
Power supply		V/Ph/Hz	220-240/1/50		
Air flow (H/M/L)		m³/h	1184/997/783	1278/1057/855	1328/1052/927
		CFM	696/586/460	751/621/502	780/618/545
Cooling¹	Capacity (H/M/L)	kW	4.96/4.383/3.642	5.178/4.563/3.875	5.129/4.413/4.06
	Water flow rate(H/M/L)	m³/h	0.9/0.8/0.67	0.94/0.83/0.71	0.93/0.81/0.75
	Water pressure drop(H/M/L)	kPa	14.8/11.5/8.1	15.9/12.4/9	16/14.2/10.4
	Power input(H/M/L)	W	62/44/30	72/50/35	80/49/40
Heating²	Capacity (H/M/L)	kW	6.148/5.43/4.614	6.519/5.785/4.944	6.684/5.748/5.283
	Water flow rate(H/M/L)	m³/h	0.58/0.52/0.45	0.61/0.55/0.47	0.62/0.54/0.50
	Water pressure drop(H/M/L)	kPa	25.3/20.5/14.5	32/25.7/19.1	32.6/24.7/21.2
	Power input(H/M/L)	W	56/36/21	67/42/25	75/41/31
Heating³	Capacity (H/M/L)	kW	6.94/6.217/5.266	7.374/6.533/5.6	7.657/6.584/6.033
	Water flow rate(H/M/L)	m³/h	0.64/0.58/0.50	0.68/0.61/0.53	0.71/0.61/0.57
	Water pressure drop(H/M/L)	kPa	37.2/26.1/19.3	39.5/32.5/23.8	41.6/31.5/26.8
	Power input(H/M/L)	W	55/36/21	68/43/25	76/42/31
Sound power level	(H/M/L)	dB(A)	54/49/43	56/51/45	57/51/48
Sound pressure level	(H/M/L)	dB(A)	42/37/31	44/39/33	45/39/36
Rated current		A	0.48	0.6	0.72
Fan motor	Type		7	DC motor	DC motor
	Quantity		1	1	1
Fan	Type		Centrifugal, forward-curved Blades		
	Quantity		1		1
Coil	Row		2	2	2
	Max. working pressure	MPa	1.6	1.6	1.6
	Diameter	mm	Ø7	Ø7	Ø7
Panel	Net dimensions (WxHxD)	mm	950x45x950	950x45x950	950x45x950
	Packing size (WxHxD)	mm	1035x90x1035	1035x90x1035	1035x90x1035
	Net weight	kg	6	6	6
	Gross weight	kg	9	9	9
Body	Net dimensions (WxHxD)	mm	840x300x840	840x300x840	840x300x840
	Packing size (WxHxD)	mm	900x330x900	900x330x900	900x330x900
	Net weight	kg	27.5	27.5	
	Gross weight	kg	33.5	33.5	33.5
Pipe connections	Water inlet/outlet pipe	inch	Cold water: RC3/4; Hot water: RC1/2		
	Drain pipe	mm	ODØ32	ODØ32	ODØ32

Model			NFC-V950R-2-4P	NFC-V1200R-3-4P	NFC-V1500R-3-4P
Power supply		V/Ph/Hz	220-240/1/50		
Air flow (H/M/L)		m³/h	1403/1115/1001	1642/1421/1285	1708/1297/1096
		CFM	824/655/588	965/835/755	1004/762/644
Cooling¹	Capacity (H/M/L)	kW	5.306/4.593/4.279	7.984/7.245/6.697	8.038/6.623/5.837
	Water flow rate(H/M/L)	m³/h	0.96/0.84/0.78	1.42/1.29/1.2	1.43/1.19/1.05
	Water pressure drop(H/M/L)	kPa	16.4/12.6/10.9	33.9/30/24	33/22.6/17.7
	Power input(H/M/L)	W	90/54/43	121/83/66	139/70/49
Heating²	Capacity (H/M/L)	kW	6.736/5.833/5.442	9.746/8.962/8.422	9.93/8.326/7.512
	Water flow rate(H/M/L)	m³/h	0.63/0.55/0.52	0.89/0.82/0.77	0.90/0.76/0.69
	Water pressure drop(H/M/L)	kPa	34/26.6/23.5	42.4/36.6/32.6	48.7/32.5/27
	Power input(H/M/L)	W	84/46/35	118/79/61	125/64/42
Heating³	Capacity (H/M/L)	kW	7.659/6.646/6.204	11.045/10.149/9.527	11.342/9.596/8.683
	Water flow rate(H/M/L)	m³/h	0.71/0.62/0.58	1.0/0.92/0.87	1.02/0.87/0.79
	Water pressure drop(H/M/L)	kPa	43.8/33.5/29.3	52.1/44.9/40.6	62.1/45.7/38.3
	Power input(H/M/L)	W	84/45/35	118/79/61	125/64/42
Sound power level	(H/M/L)	dB(A)	58/53/50	60/56/54	61/55/50
Sound pressure level	(H/M/L)	dB(A)	46/41/38	48/44/42	49/43/38
Rated current		A	0.72	1.08	1.32
Fan motor	Type		DC motor	DC motor	DC motor
	Quantity		1	1	1
Fan	Type		Centrifugal, forward-curved Blades		
	Quantity		1		1
Coil	Row		2	3	3
	Max. working pressure	MPa	1.6	1.6	1.6
	Diameter	mm	Ø7	Ø7	Ø7
Panel	Net dimensions (WxHxD)	mm	950x45x950	950x45x950	950x45x950
	Packing size (WxHxD)	mm	1035x90x1035	1035x90x1035	1035x90x1035
	Net weight	kg	6	6	6
	Gross weight	kg	9	9	9
Body	Net dimensions (WxHxD)	mm	840x300x840	840x300x840	840x300x840
	Packing size (WxHxD)	mm	900x330x900	900x330x900	900x330x900
	Net weight	kg	30	30	
	Gross weight	kg	32.4	35	35
Pipe connections	Water inlet/outlet pipe	inch	Cold water: RC3/4; Hot water: RC1/2		
	Drain pipe	mm	ODØ32	ODØ32	ODØ32

Notes:

H: High fan speed; M: Medium fan speed; L: Low fan speed.

1: Cooling mode (2 and 4-pipe coil): entering air temperature 27°C DB/1 9°C WB, entering/leaving water temperature 7°C /12°C.

2: Heating mode(1): (4-pipe coil): entering air temperature 20°C DB, entering/leaving water temperature 65/55°C.

3: Heating mode(2): (4-pipe coil): entering air temperature 20°C DB, entering/leaving water temperature 70/60°C.

4.Sound pressure level is tested in a semi-anechoic test room.

5.Sound power level is tested in a reverberation chamber.

2-Pipe Compact 4-Way Cassette



Model			NFC-V300-2-2P	NFC-V400-2-2P	NFC-V500-2-2P
Power supply		V/Ph/Hz	220-240/1/50		
Air flow (H/M/L)		m³/h	535/429/322	610/477/381	781/611/494
		CFM	314/252/189	359/281/224	459/359/290
Cooling¹	Capacity (H/M/L)	kW	2.98/2.53/2	3.96/3.26/2.76	4.2/3.48/3.01
	Water flow rate(H/M/L)	m³/h	0.53/0.45/0.35	0.7/0.58/0.51	0.75/0.61/0.54
	Water pressure drop(H/M/L)	kPa	10/7/5	11.48/8.2/6.54	12.32/8.62/7.4
	Power input(H/M/L)	W	15/9/5	28/15/9	43/28/21
Heating²	Capacity (H/M/L)	kW	2.61/2.31/2.24	4.08/3.34/2.73	4.95/3.99/3.26
	Water flow rate(H/M/L)	m³/h	0.64/0.54/0.42	0.83/0.67/0.56	0.87/0.70/0.58
	Water pressure drop(H/M/L)	kPa	12.1/8.5/5.3	9.2/8.6/6	9.4/8.23/6.1
	Power input(H/M/L)	W	15/9/5	28/16/10	33/18/11
Heating³	Capacity (H/M/L)	kW	4.01/3.35/2.61	4.78/3.84/3.18	5.76/4.69/3.84
	Water flow rate(H/M/L)	m³/h	0.53/0.45/0.35	0.7/0.58/0.51	0.75/0.61/0.54
	Water pressure drop(H/M/L)	kPa	8.2/6/3.8	12.68/6.4/4.92	11.41/6.5/5.41
	Power input(H/M/L)	W	14/9/5	28/16/10	33/18/11
Sound pressure level	(H/M/L)	dB(A)	39/33/27	42/36/30	43/38/32
Fan motor	Type		DC Motor	DC Motor	DC Motor
	Quantity		1	1	1
Fan	Type		Centrifugal, forward-curved Blades		
	Quantity		1	1	1
Coil	Row		2	2	2
	Max. working pressure	MPa	1.6	1.6	1.6
	Diameter	mm	Ø7	Ø7	Ø7
Panel	Net dimensions (WxHxD)	mm	647x50x647	647x50x647	647x50x647
	Packing size (WxHxD)	mm	715x123x715	715x123x715	715x123x715
	Net weight	kg	2.5	2.5	2.5
	Gross weight	kg	4.5	4.5	4.5
Body	Net dimensions (WxHxD)	mm	575x261x575	575x261x575	575x261x575
	Packing size (WxHxD)	mm	670x290x670	670x290x670	670x290x670
	Net weight	kg	16.5	16.5	16.5
	Gross weight	kg	22.5	22.5	22.5
Pipe connections	Water inlet/outlet pipe	inch	G3/4	G3/4	G3/4
	Drain pipe	mm	ODØ25	ODØ25	ODØ25

4-Pipe Compact 4-Way Cassette

Model			NFC-V300-2-4P	NFC-V400-2-4P	NFC-V500-2-4P
Power supply		V/Ph/Hz	220-240/1/50		
Air flow (H/M/L)		m³/h	493/395/295	669/523/415	673/526/425
		CFM	290/232/173	393/307/244	395/309/250
Cooling¹	Capacity (H/M/L)	kW	2.161/1.861/1.485	2.777/2.375/2.045	2.771/2.382/2.069
	Water flow rate(H/M/L)	m³/h	0.42/0.37/0.3	0.53/0.46/0.4	0.56/0.49/0.43
	Water pressure drop(H/M/L)	kPa	17.4/13.5/9.3	13.15/9.4/7	16.8/13.1/10.3
	Power input(H/M/L)	W	15/10/6	30/26/21	35/19/12
Heating²	Capacity (H/M/L)	kW	3.131/2.628/2.077	3.711/3.138/2.65	3.942/3.296/2.826
	Water flow rate(H/M/L)	m³/h	0.32/0.28/0.23	0.37/0.32/0.28	0.42/0.36/0.32
	Water pressure drop(H/M/L)	kPa	23.5/17.1/11.3	24.1/17.9/13.1	26.8/19.2/14.5
	Power input(H/M/L)	W	17/10/6	32/18/11	35/18/11
Heating³	Capacity (H/M/L)	kW	3.564/2.989/2.356	4.251/3.584/3.023	4.508/3.789/3.222
	Water flow rate(H/M/L)	m³/h	0.36/0.31/0.25	0.41/0.36/0.31	0.47/0.40/0.36
	Water pressure drop(H/M/L)	kPa	29.8/21.7/14.3	30.4/22.2/16.7	36.1/25.9/19
	Power input(H/M/L)	W	17/10/6	31/18/11	35/19/11
Sound power level	(H/M/L)	dB(A)	51/45/39	54/47/42	56/51/43
Sound pressure level	(H/M/L)	dB(A)	39/33/27	42/35/30	44/39/31
Rated current		A	0.24	0.36	0.48
Fan motor	Type		DC motor	DC motor	DC motor
	Quantity		1	1	1
Fan	Type		Centrifugal, forward-curved Blades		
	Quantity		1		1
Coil	Row		2	2	2
	Max. working pressure	MPa	1.6	1.6	1.6
	Diameter	mm	Ø7	Ø7	Ø7
Panel	Net dimensions (WxHxD)	mm	647x50x647	647x50x647	647x50x647
	Packing size (WxHxD)	mm	715x123x715	715x123x715	715x123x715
	Net weight	kg	2.5	2.5	2.5
	Gross weight	kg	4.5	4.5	4.5
Body	Net dimensions (WxHxD)	mm	575x261x575	575x261x575	575x261x575
	Packing size (WxHxD)	mm	675x320x675	675x320x675	675x320x675
	Net weight	kg	16.7	16.7	
	Gross weight	kg	22.7	22.7	22.7
Pipe connections	Water inlet/outlet pipe	inch	Cold water: G3/4; Hot water: G1/2		
	Drain pipe	mm	ODØ25	ODØ25	ODØ25

Notes:

H: High fan speed; M: Medium fan speed; L: Low fan speed.

1: Cooling mode (2 and 4-pipe coil): entering air temperature 27°C DB/1 9°C WB, entering/leaving water temperature 7°C /12°C.

2: Heating mode(1): (4-pipe coil): entering air temperature 20°C DB, entering/leaving water temperature 65/55°C.

3: Heating mode(2): (4-pipe coil): entering air temperature 20°C DB, entering/leaving water temperature 70/60°C.



4.Sound pressure level is tested in a semi-anechoic test room.

5.Sound power level is tested in a reverberation chamber.

Dimensions



4-way cassette

2-pipe 4-way cassette
Dimensions (unit:mm)

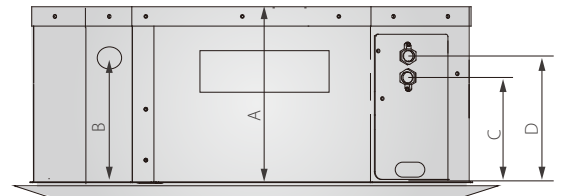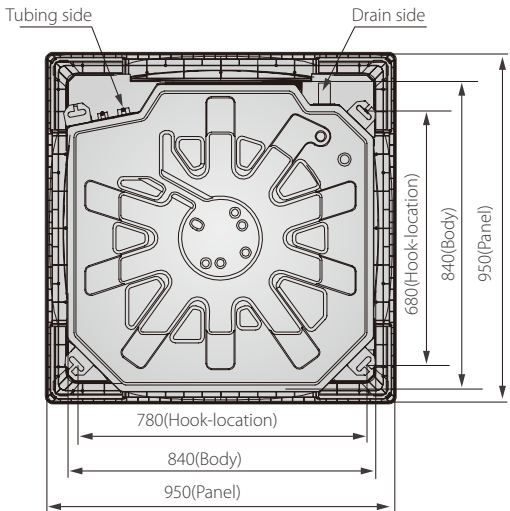


Model	Size	A	B	C	D
NFC-V600R		230	170	135	185
NFC-V750R					
NFC-V850R		300	190	145	195
NFC-V950R					
NFC-V1200R					
NFC-V1500R					

4-Pipe 4-way cassette
Dimensions (unit:mm)

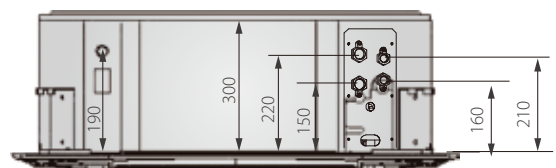
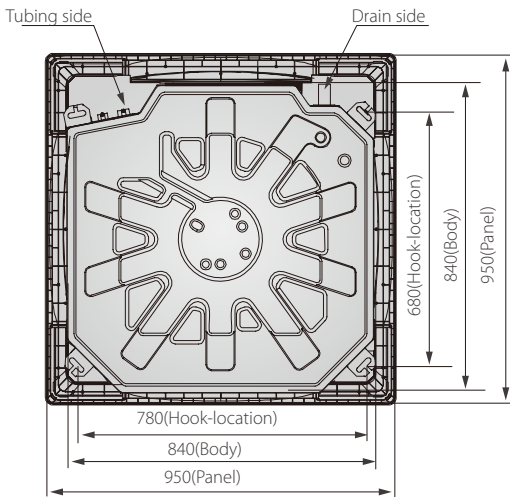


Service Spaces (unit:mm)


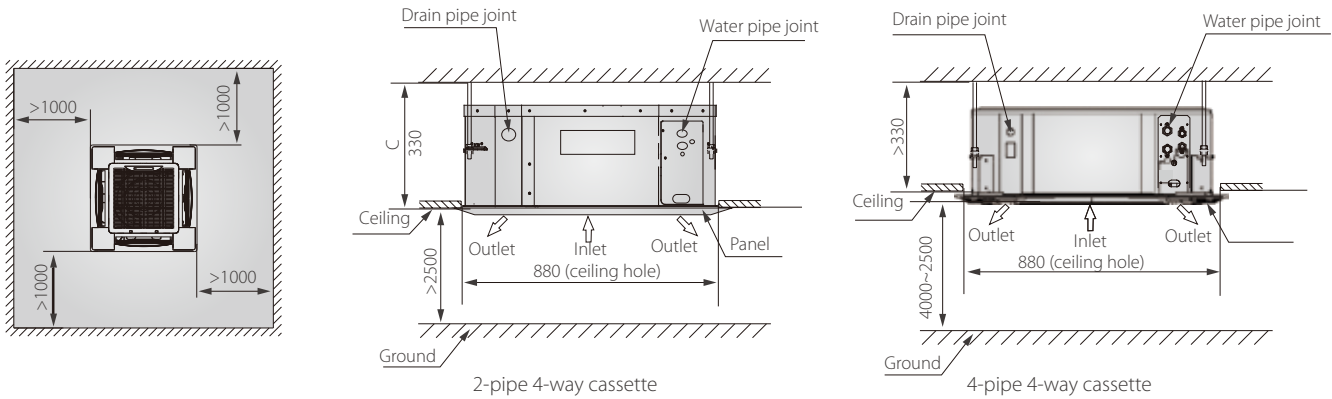


Compact 4-way cassette


2-pipe compact 4-way cassette
Dimensions (unit: mm)

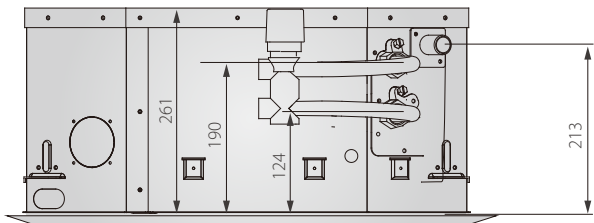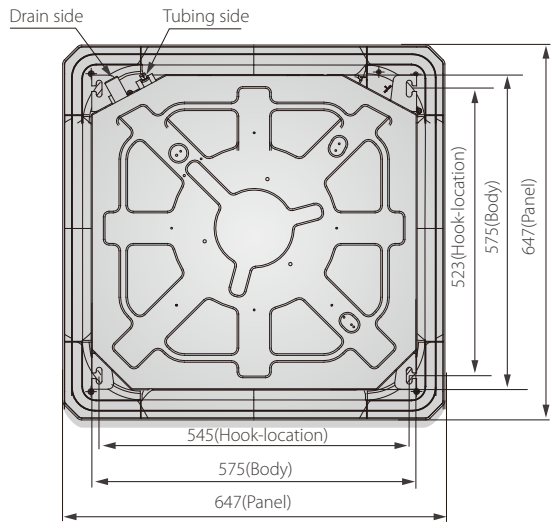


4-pipe compact 4-way cassette
Dimensions (unit: mm)

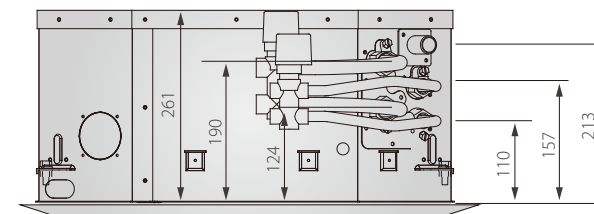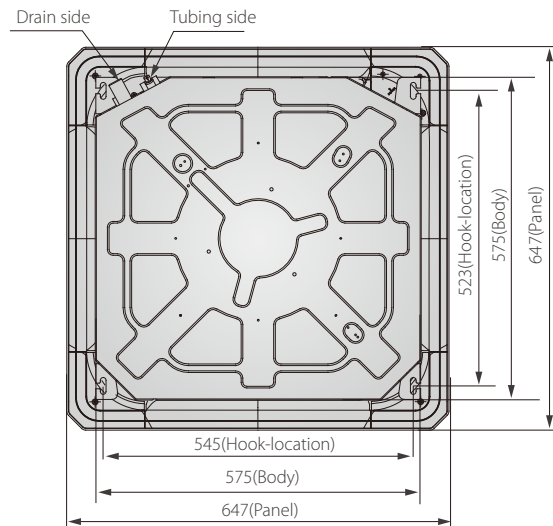

Service Spaces (unit: mm)

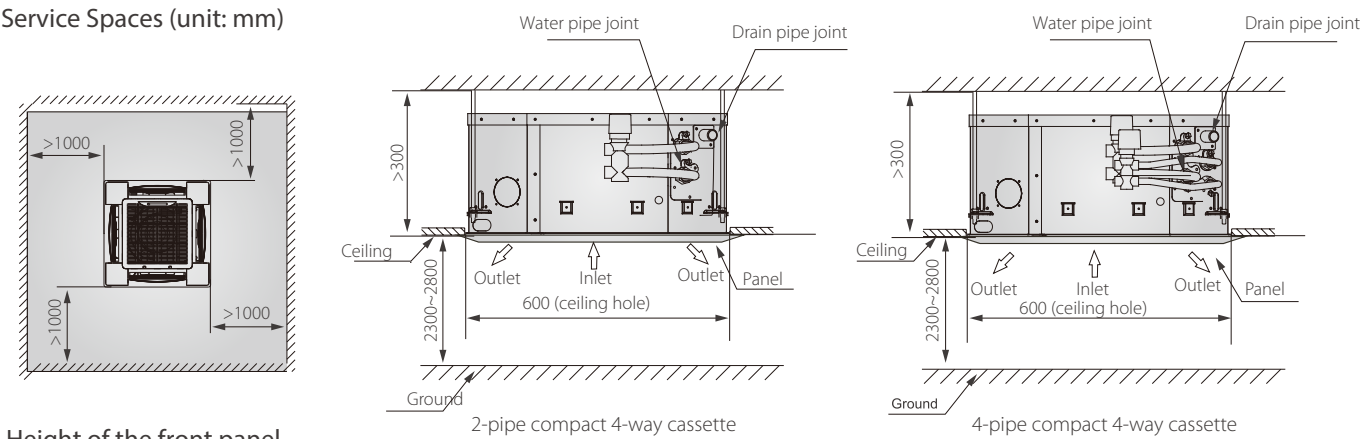

Height of the front panel

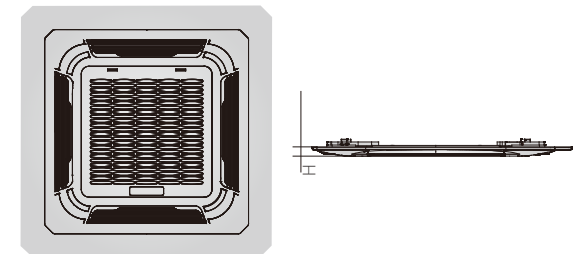

Type	H (mm)
4-way cassette	45
Compact 4-way cassette	50